



ELECTRICAL DATA RSB-2:
 2 SP/DT MICRO-SWITCHES.
 (RSB-1 HAS ONE SP/DT MICRO-SWITCH).

SP/DT MICRO-SWITCH RATING:
 20 AMPS 125, 250 OR 480 VAC
 1 HP 125 VAC; 2 HP 250 VAC

SP/DT TERMINALS:








DP/DT TERMINALS:



ELECTRICAL DATA RSB-5:
 2 DP/DT SWITCHES.
 (RSB-4 HAS ONE DP/DT SWITCH).

DP/DT SWITCH DATA:
 15 AMPS 125 OR 250 VAC
 3/4 HP 125 VAC; 1 1/5 HP 250 VAC

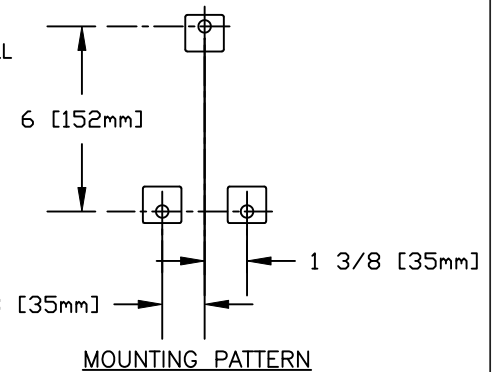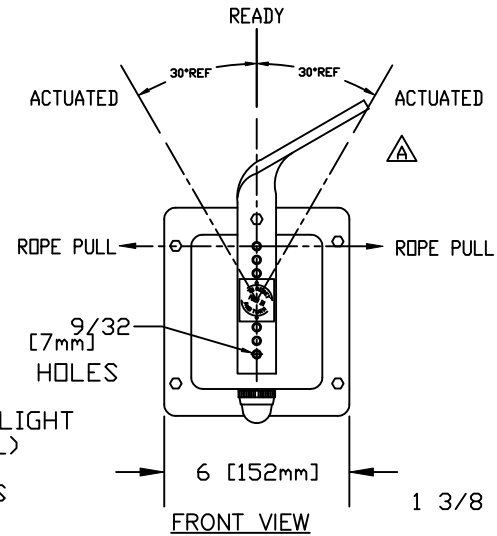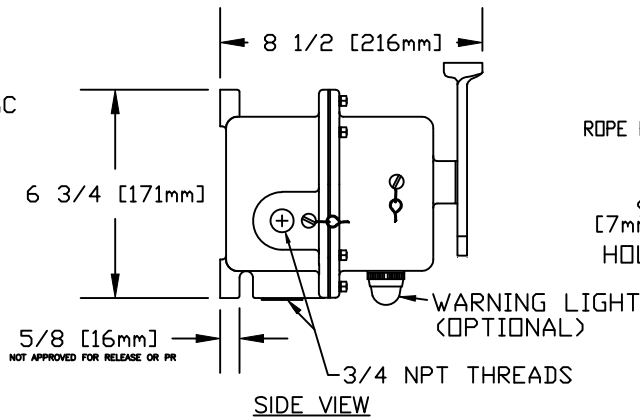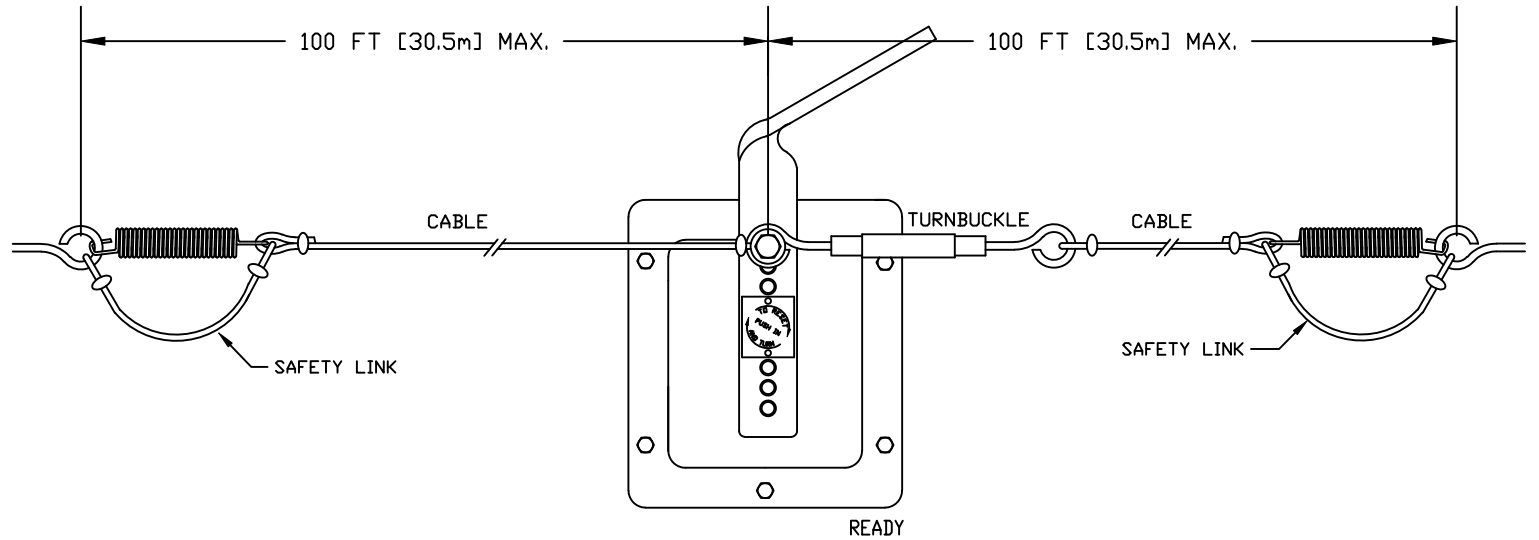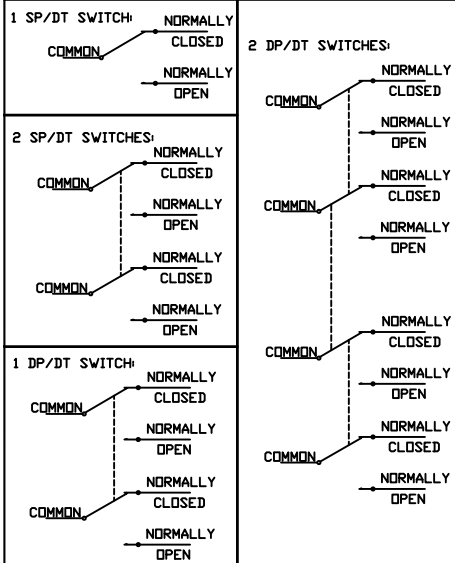

REVISIONS					
REV.	E.C.O.	DESCRIPTION	DATE	BY	APP'D
A	0240c	CLARIFY POSITIONAL RANGE	06/117/20	LW	GL

REFER TO DATA SHEET AND INSTRUCTIONS.
 ENCLOSURE TYPES 3, 4 AND 4X.

CONVEYOR COMPONENTS COMPANY Division of Material Control, Inc. 130 SELTZER RD., CROSWELL, MICH. 48422			
<i>THIS PRINT HAS NO SCALE & SHOULD NOT BE SCALED</i>			
DRAWN: GL CHECK: --- APPR.: JK	3/10/2014 ---/---/--- 03/11/2014	THIS DRAWING WAS COMPUTER GENERATED IN FULL SCALE RSB PRODUCT DRAWING	
<small>THIS PRINT IS THE PROPERTY OF CONVEYOR COMPONENTS COMPANY AND MUST NOT BE USED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION. PLEASE RETURN ON DEMAND.</small>	PART NO. RSB	DWS NO. DO170141	REV. A